

OH2DNF40-1/6


1GHz-6GHz 40dB

40dB High-power Dual Directional Coupler

1. Specifications

Frequency Range	1GHz~6GHz
Insertion Loss	$\leq 0.3\text{dB}$
Input/Output VSWR	≤ 1.20
Coupling	$40\text{dB} \pm 1.2\text{dB}$
Coupling Sensitivity	$\pm 1.0\text{dB}$
Directivity	$\geq 16\text{dB}$
Power Handling	200W
Connectors	Main path: N-Female Coupling: SMA-Female
Surface Finish	Conductive Oxidation

2. Outline Dimensions (mm/[inch])

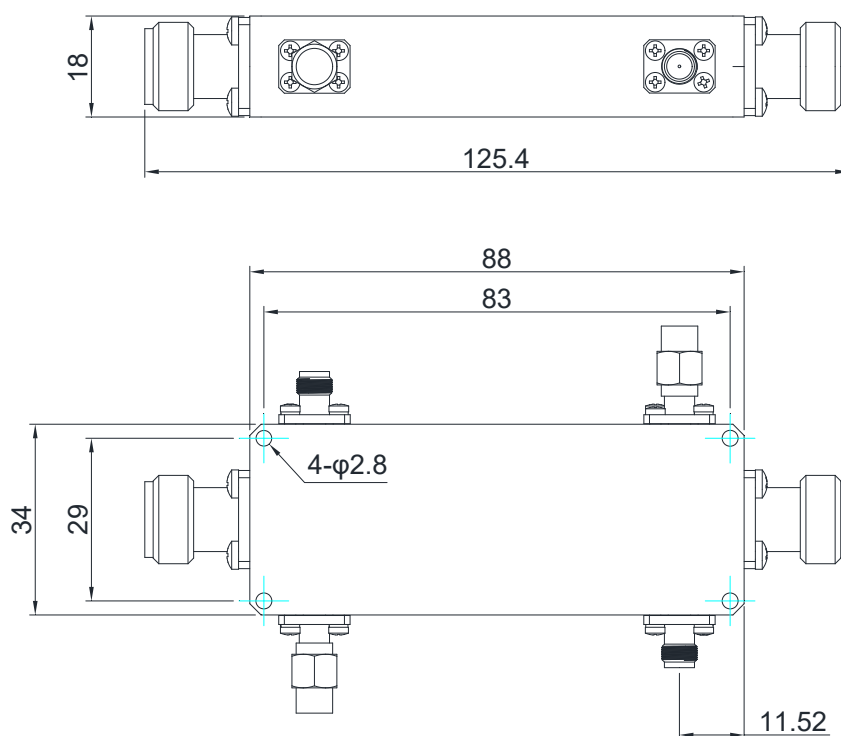

Test curve:

