


Coaxial Adapter

2.92/SMP-JJ

1. Technical Specifications

Electrical Performance		Material and Plating	
Frequency Range	10MHz~40GHz	Outer Conductor	Stainless Steel SUS303, Passivated
VSWR	≤1.25	Inner Conductor	Beryllium Copper, Gold Plated
Insertion Loss	≤0.12dB	Dielectric	PEI
Characteristic Impedance	50Ω		
Mating Cycles	500 times		

2.Outline Dimensions (Unit: mm)

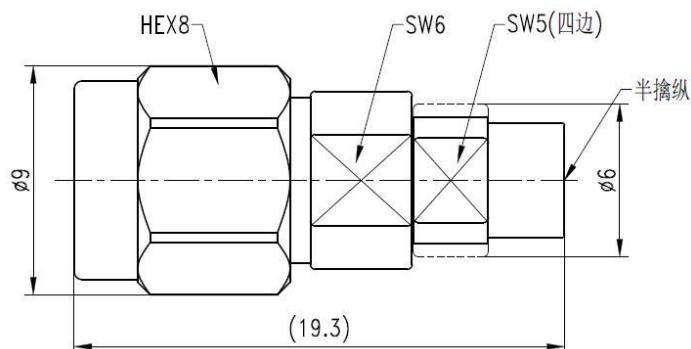

3. Test Curve

